



# FOCUS

## ICE CREAM & DISPLAY FREEZER


With the FOCUS freezer, Elcold has succeeded to design two very different parameters into one unit: Elegance but still robust. The result is an optimal way to catch the attention of your customers. The lid design, the improved insulation and the heated frame ensure minimum ice build-up.

## FEATURES

- HC refrigerants as standard
- Heating wire and extra hot pipe in the top frame to prevent condensation
- Environmentally friendly
- Low service costs
- Perfect view to the products
- Long life
- Available in all climate classes
- Minimum icebuild-up
- Designed for transport
- Eye Catching design
- 75 mm insulation
- Also available as combination of cooler and freezer
- Accessories including baskets - see page 62
- Graphics (option)
- LED internal light (option)

## THINK GREEN


SAVE UP TO 30% ENERGY

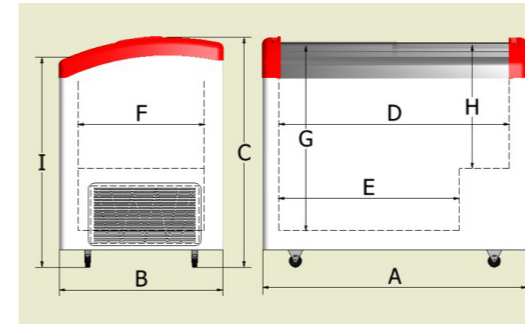

Dimensions according to technical data below

Heavy investment in new technology has resulted in very low energy consumption and use of the environmental friendly hydro carbon gas. Cyclopentane is used as blowing agent.

### TYPICAL CONFIGURATION OF VENTILATION GRIDS

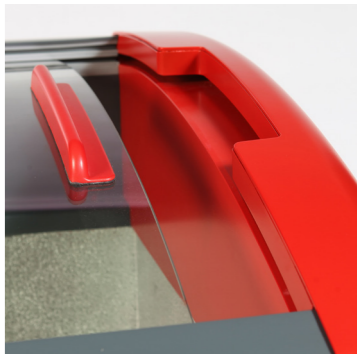

	FOCUS 73	FOCUS 106	FOCUS 131	FOCUS 151	FOCUS 171
Climate class A see *) below	A	A	A	A	A
Ambient temperature range	+16 to +30	+16 to +30	+16 to +30	+16 to +30	+16 to +30
Climate class B see *) below	B	B	B	B	B
Ambient temperature range	+16 to +35	+16 to +35	+16 to +35	+16 to +35	+16 to +35
Gross volume, litres	161	270	352	418	484
Net volume, litres	113	193	254	302	351
Temperature range inside unit	-16 to -23	-16 to -23	-16 to -23	-16 to -23	-16 to -23
Standard refrigerant	R600a	R600a	R600a	R290	R290
Energy consumption / 24 h kwh at 30 deg. C	1,821 (R600a)	2,313 (R600a)	3,222 (R600a)	3,965 (R290)	4,376 (R290)
Annual energy consumption kwh	664,67	844,25	1176,03	1293,11	1544,72
Energy efficiency index	58,39%	61,89%	75,17%	71%	77,3%
Energy class	E	E	F	F	F
Input power (watt)	141	155	211	230	230

DIMENSIONS					
External dimensions (WxDxH)	726*656*850	1056*656*850	1306*656*850	1506*656*850	1706*656*850
Internal dimensions (WxDxH)	570*500*670	900*500*670	1150*500*670	1350*500*670	1550*500*670
Dimension A	726	1056	1306	1506	1706
Dimension B	656	656	656	656	656
Dimension C	850	850	850	850	850
Dimension D	570	900	1150	1350	1550
Dimension E	370	700	950	1150	1350
Dimension F	500	500	500	500	500
Dimension G	670	670	670	670	670
Dimension H	420	420	420	420	420
Dimension I	760	760	760	760	760
Insulation (mm)	75	75	75	75	75

ACCESSORIES					
Dividers	Optional	Optional	Optional	Optional	Optional
Max. number of baskets (model C75-01/C75-02)	2/3	4/4	5/6	6/7	7/8
Castors	Incl.	Incl.	Incl.	Incl.	Incl.
Castors w. brakes	Optional	Optional	Optional	Optional	Optional
Lock	Optional	Optional	Optional	Optional	Optional
Thermometer	Optional	Optional	Optional	Optional	Optional
Internal light	Optional	Optional	Optional	Optional	Optional

OTHER DATA					
Outer cabinet	White	White	White	White	White
Inner cabinet	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
Inner cabinet: option	Steel inner liner	Steel inner liner	Steel inner liner	Steel inner liner	Steel inner liner
Graphics	Optional	Optional	Optional	Optional	Optional
Type of cooling	Static	Static	Static	Static	Static
Type of defrost	Manual	Manual	Manual	Manual	Manual
Power	220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz
Power 110volt / 60Hz	Optional	Optional	Optional	Optional	Optional
UL approval / DOE approval	Yes	Yes	Yes	Yes	Yes
Thermostat	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
Net weight, kg	44	54	62	68	73
Gross weight, kg	47	58	66	73	79

SHIPPING					
20' cont. Capacity	42	30	24	20	18
40' cont. Capacity	90	64	50	44	40
40' HC cont. Capacity	135	96	75	66	59
Standard Trailer capacity	153	108	90	75	66

\*) Climate class 4 has been changed into Climate class A according to the new EU regulation.  
 \*) Climate class 7 has been changed into Climate class B according to the new EU regulation.  
 \*) Climate class 5 has been changed into Climate class C according to the new EU regulation.



S-DISPLAY